





บริษัทสยาม โชติพัฒน์แมชชีนเนอรี จำกัด
SIAM CHOTIPATH MACHINERY CO.,LTD.



KSE-110x160
KSE-140x230
KSE-140x325
KSE-300x500
各方向應力不均



KSE-130 / KSE-165
KSE-200 / KSE-250
適用機加吊機

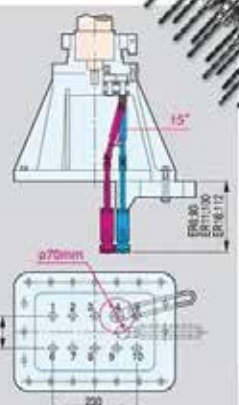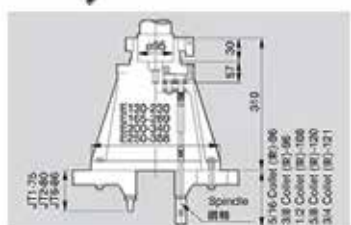

COMPANY PROFILE

Siam Chotipath Machinery Co.,LTD.

has been established Since 2012 where it was an Imported agency of foreign machines as Taiwan & Japan. Which it is one of machinery experts such as drilling machinery, gear screw tapping machine, making a special work of ordering customer tool by including making the special drilling Tapping Machine. For our machines, they are Produced from the Taiwan & Japan factory. Where it has the professional technician teams who have specific expertise and have researched and developed products through 10 years. Through the passing period of time, our companies have imported many products selling to several industrial factories in Thailand. They have a good response from our customers very much, for example the public relations, connection and advisement of products and meeting, after sale service and advisement of technique and operation methods of machinery correctly and understandingly as well.



โปรไฟล์บริษัท

บริษัท สยาม โชติพัฒน์ แมชชีนเอนรี จำกัด

ก่อตั้งขึ้นเมื่อปี 2012 โดยเป็นตัวแทนนำเข้าเครื่องจักรจากต่างประเทศคือ "ประเทศไต้หวัน" ซึ่งจัดว่าเป็นหนึ่งในผู้เชี่ยวชาญด้านเครื่องจักร อาทิเช่น เครื่องเจาะรู เครื่องตัดปกลี้อย หรือสร้างเครื่องพิเศษตามรูปแบบงานตามที่ลูกค้าสั่งทำโดยเครื่องจักรของเรานั้นทำการผลิตจากโรงงานที่ประเทศไต้หวัน ซึ่งทำงานโดยมีช่างระดับมืออาชีพ มีความเชี่ยวชาญ เฉพาะด้าน และมีการคิดค้นพัฒนา สินค้า มาโดยตลอด 10 ปี ตลอดช่วงระยะเวลาที่ผ่านมาทางบริษัทได้นำเข้าสินค้ามาจำหน่ายในอุตสาหกรรม ในโรงงานต่าง ๆ ในประเทศไทย ซึ่งได้รับการตอบสนองความพึงพอใจจากลูกค้าเป็นอย่างมาก อาทิเช่น การติดต่อประชาสัมพันธ์แนะนำสินค้าและการเข้าพบการให้บริการหลังการขายและให้คำปรึกษาเกี่ยวกับเทคนิค และวิธีการใช้งานของเครื่องอย่างถูกต้องและเข้าใจงานเป็นอย่างดี

Automatic Hydraulic Drilling Machine : SSH-20

Max. Drilling Capacity: 20mm. (เครื่องเจาะรูอัตโนมัติระบบไฮดรอลิก)
เจาะรูใหญ่สุด 20 mm รุ่น SSH-20



Model Name	Spindle Travel mm	Dia of Spindle mm	Capacity mm	Distance of Spindle to table mm	Working Table Size mm	Motor of Spindle	Spindle rpm		Spindle Taper	Working Pressure	Dia of Column mm
							50Hz	60Hz			
SSH-20 350 kg	135	ø65	ø20 (steel)	670	390×430	3ø	420	500	MT2	20kgf/cm2 (2MPa)	ø102
						4P	675	810			
						2HP	1000	1200			
							1500	1800			

Automatic Hydraulic Drilling Machine : SSH-30

Max.Drilling Capacity: 30mm. (เครื่องเจาะรูอัตโนมัติระบบไฮดรอลิก)
เจาะรูใหญ่สุด 30 mm รุ่น SSH-30



Model Name	Spindle Travel mm	Dia of Spindle mm	Capacity mm	Distance of Spindle to table mm	Working Table Size mm	Motor of Spindle	Spindle rpm		Spindle Taper	Working Pressure	Dia of Column mm
							50Hz	60Hz			
SSH-30 420 kg	140	ø75	ø30 (steel)	630	370×430	3ø 6P 2HP	335	400	MT3	20kgf/cm2 (2MPa)	ø120
							670	800			
							1000	1200			
							1500	1800			

Automatic Gear-pitch Type Tapping Machine : SS-110T

Max.Tapping Capacity:M2-10mm
เครื่องตีเกลียวใช้เกียร์พิทช์อัตโนมัติ

เครื่องตัดปกลีวยใช้เกียร์พิตอัตโนมัติ



without table



with table

Model Name	Spindle Travel mm	Swing mm	Capacity mm	Distance of Spindle to table mm	Table Size mm	Motor	Spindle rpm		Gear Pitch		Multi-Spindle Capacity mm
							50Hz	60Hz	TPI	mm	
SS-110T 108 kg	45	330	φ2-φ10	670	235×230	3φ 4P 0.75kw (1HP)	1340 760 420	1600 900 500	64, 56, 48, 44, 40, 32, 28, 24, 20, 18, 16	0.2, 0.25, 0.3, 0.35, 0.4, 0.45, 0.5, 0.6, 0.7, 0.75, 0.8, 0.9, 1.0, 1.25	φ3×10 spindle, φ4×5 spindle, φ5×2 spindle
615×350 ×755mm											

Automatic Gear-pitch Type Tapping Machine : SS-220T

Max.Tapping Capacity:M5-20mm
เครื่องต๊าปเกลียวใช้เกียร์พิตอัตโนมัติ

เครื่องตัดปกลีวยใช้เกียร์พิตอัตโนมัติ



without table



with table

Model Name	Spindle Travel mm	Swing mm	Capacity mm	Distance of Spindle to table mm	Table Size mm	Motor	Spindle rpm		Gear Pitch		Multi-Spindle Capacity mm
							50Hz 4P	50Hz 6P	TPI	mm	
SS-220T 200 kg 830×425 ×1050mm	65	430	Φ5-Φ20	670	340×360	3Φ 4P/6P 1.5kw (2HP)	590 400 250	505 285 155	28, 24, 20, 19, 18, 16, 14, 12, 11, 10	0.7, 0.8, 0.9, 1.0, 1.25, 1.5, 1.75, 1.8, 2.0, 2.5	Φ6×9 spindle, Φ8×4 spindle, Φ12×2 spindle

Automatic Gear-pitch Type Tapping Machine : SS-335T

Max.Tapping Capacity:M10-35mm
เครื่องตีเกลียวใช้เกียร์พิตอัตโนมัติ

เครื่องตัดปกลีวยใช้เกียร์พิตอัตโนมัติ



without table



with table

Model Name	Spindle Travel mm	Swing mm	Capacity mm	Distance of Spindle to table mm	Table Size mm	Motor	Spindle rpm		Gear Pitch		Multi-Spindle Capacity mm
							50Hz 6P	50Hz 4P	TPI	mm	
SS-335T 380 kg	65	460	ϕ10-ϕ35	600	420×370	3ϕ 6P/4P 2.25kw (3HP)	280 150 80	420 220 120	19, 16, 14, 12, 11, 10, 9, 8	1.5, 1.75, 2.0, 2.5, 3.0, 3.5	ϕ10×10 spindle, ϕ16×4 spindle, ϕ20×2 spindle

Drilling & Tapping Machine:

SS-416C/SS-425C



Model	SS-416C	SS-425C
Maximum Drilling Capacity	16 mm	25 mm
Maximum Tapping Capacity : Cast Iron/Steel	M12/M10	M24/M20
Maximum Spindle Travel	85 mm	125 mm
Spindle Taper	MT2	MT3
Spindle Speeds rpm	495~2565	290, 420, 740, 1260, 2150
Distance Spindle Axis to Column Generating Line	180 mm	240 mm
Dimensions of Working Table Surface	Φ300 mm	280 × 300 mm
Dimension of Base Surface	445 × 270 mm	590 × 375 mm
Maximum Distance Spindle Nose to Table	410 mm	367 mm
Maximum Distance Spindle Nose to Base	590 mm	630 mm
Motor	550 W (0.75HP)	1.1 Kw (1.5HP)
Overall Height	960 mm	1127 mm
Net Weight	65 kg	140 kg

Manual Drilling Machine:

SS-16C/SS-16D



Model	SS-16C	SS-16D
Maximum Drilling Capacity	16 mm	16 mm
Diameter of Column	70 mm	71 mm
Maximum Spindle Travel	85 mm	80 mm
Spindle Taper	MT2	MT3
Spindle Speeds rpm	270~2880	250~3200
Distance Spindle Axis to Column Generating Line	180 mm	182 mm
Dimensions of Working Table Surface	Φ300 mm	Φ306 mm
Dimension of Base Surface	445 × 270 mm	440 × 255 mm
Maximum Distance Spindle Nose to Table	410 mm	375 mm
Maximum Distance Spindle Nose to Base	590 mm	565 mm
Motor	380V / 370W (3 Phase)	220V / 250W / 370W (1 Phase)
Overall Height	960 mm	985 mm
Net Weight	65 kg	57 kg

Air Tapping Machine (Labor-Saving Type)



Model	Tapping Ability	rpm	Length	Connection	Weight
SS-308D	M3~M8	8600	158 mm	1/4"PT	0.9 kg
SS-612D	M6~M12	8200	168 mm	1/4"PT	1.1 kg

Air Tapping Machine (Universal Direction)



Model	Tapping Ability	rpm	Radius	Air Pressure	Weight
SS-12AT	M3~M12	0-400	900 mm	8-10 kg	18 kg

Electric Tapping Machine (Universal Direction)



Model	Tapping Ability	rpm	Radius	Power	Weight
SS-16ET	M3~M16	0-300	1000 mm	600W / 220V	25 kg
SS-24ET	M6~M24	0-200	1200 mm	1000W / 220V	50 kg

Multi-Spindle Drilling and Tapping Head



Adjustable U Type (Round):

Model Name	Collet	Ratio of Gear	Maximum Drilling Capacity	Minimum Distance of 2 Spindle	Maximum Distance of 2 Spindle	Spindle Number
U-110 (U-120)	C-5 C-6 JT1 C-9	1:1 1:1 1:1	5.0 6.0 8.0	13 18 33 26	110 (120)	2-6
U-165	C-6 JT1 C-9 JT2 C-12 JT6	1:1 1:1 (extra)	6.0 8.0 9.5 11	18 33 26 38 30 46	165	2-10
U-200	C-6 JT1 C-9 JT2 C-12 JT6	1:1 1:1 (extra)	6.0 8.0 9.5 11	18 33 26 38 30 46	200	4-12
U-250	C-6 JT1 C-9 JT2 C-12 JT6	1:1 1:1 (extra)	6.0 8.0 9.5 11	18 33 26 38 30 46	250	4-12
U-300	C-6 JT1 C-9 JT2 C-12 JT6	1:1 1:1 (extra)	6.0 8.0 9.5 11	18 33 26 38 30 46	300	4-14

Multi-Spindle Drilling and Tapping Head



Adjustable U Type (Square):

Model Name	Collet	Ratio of Gear	Maximum Drilling Capacity	Minimum Distance of 2 Spindle		Maximum Distance of 2 Spindle	Spindle Number
U-100 × 165	C-6 C-5	1:1	6.0	18	13	100*165	3-8
	C-9	1:1	8.0	26			
	C-12 JT6	(extra)	11.0	28	46		
U-120 × 200	C-6 JT1	1:1	6.0	18	33	120*200	4-12
	C-9 JT2	1:1	8.0	26	38		
	C-12 JT6	(extra)	11.0	28	46		
U-120 × 300	C-6 JT1	1:1	6.0	18	33	120*300	4-14
	C-9 JT2	1:1	8.0	26	38		
	C-12 JT6	(extra)	11.0	28	46		
U-160 × 450	C-6 JT1	1:1	6.0	18	33	160*450	6-14
	C-9 JT2	1:1	8.0	30	38		
	C-12 JT6	(extra)	11.0	30	46		
U-170 × 300	C-6 JT1	1:1	6.0	18	33	170*300	6-14
	C-9 JT2	1:1	8.0	30	38		
	C-12 JT6	(extra)	11.0	30	46		
U-220 × 360	C-6 JT1	1:1	6.0	18	33	220*360	6-14
	C-9 JT2	1:1	8.0	30	38		
	C-12 JT6	(extra)	11.0	30	46		

Multi-Spindle Drilling and Tapping Head



Adjustable U Type (Square):

Model Name	Collet	Ratio of Gear	Maximum Drilling Capacity	Minimum Distance of 2 Spindle		Maximum Distance of 2 Spindle	Spindle Number
U-270 × 300	C-6 JT1	1:1	6.0	18	33	270*300	6-14
	C-9 JT2	1:1	8.0	30	38		
	C-12 JT6	(extra)	11.0	30	46		
U-300 × 500	C-6 JT1	1:1	6.0	18	33	300*500	4-20
	C-9 JT2	1:1	8.0	30	38		
	C-12 JT6	(extra)	11.0	30	46		

Fixed Type:

1. Standard type:



2. With guide board type:



Multi-Spindle Drilling and Tapping Head

T Series



2C-T5



Adjustable T Type:


Model Name	Collet	Ratio of Gear	Maximum Drilling Capacity	Minimum Distance of 2 Spindle	Maximum Distance of 2 Spindle	Spindle Number
NT-71	N-1	1:1	4.0	10	71	2
NT-74	C-5	1:1	5.0	12	74	2
NT-108	C-6	1:1 1:2	6.0	18	108	2
NT-121	C-9	1:1	8.0	24	121	2
NT-121	C-12	1:1	11.0	26	121	2
ST-125	C-9	1:1	8.0	27	125	2
	ER-20	1:1	13.0	27	125	2
2C-T5	C-5	1:1	5.0	13.5	73.5	2
	ER-8	1:1	5.0	13.5	73.5	2

Adjustable A Type:



Model Name	Collet	Ratio of Gear	Maximum Drilling Capacity	Minimum Distance of 2 Spindle	Maximum Distance of 2 Spindle	Spindle Number
A-116	C-6	1:2 1:1.35 1:1	6.0	18	100	2-4
A-124	C-9	1:1.3 1:1	8.0	26	124	2-4
A-124	C-12	1:1.3 1:1	11.0	28	124	2-4


ตัวอย่างผลงาน

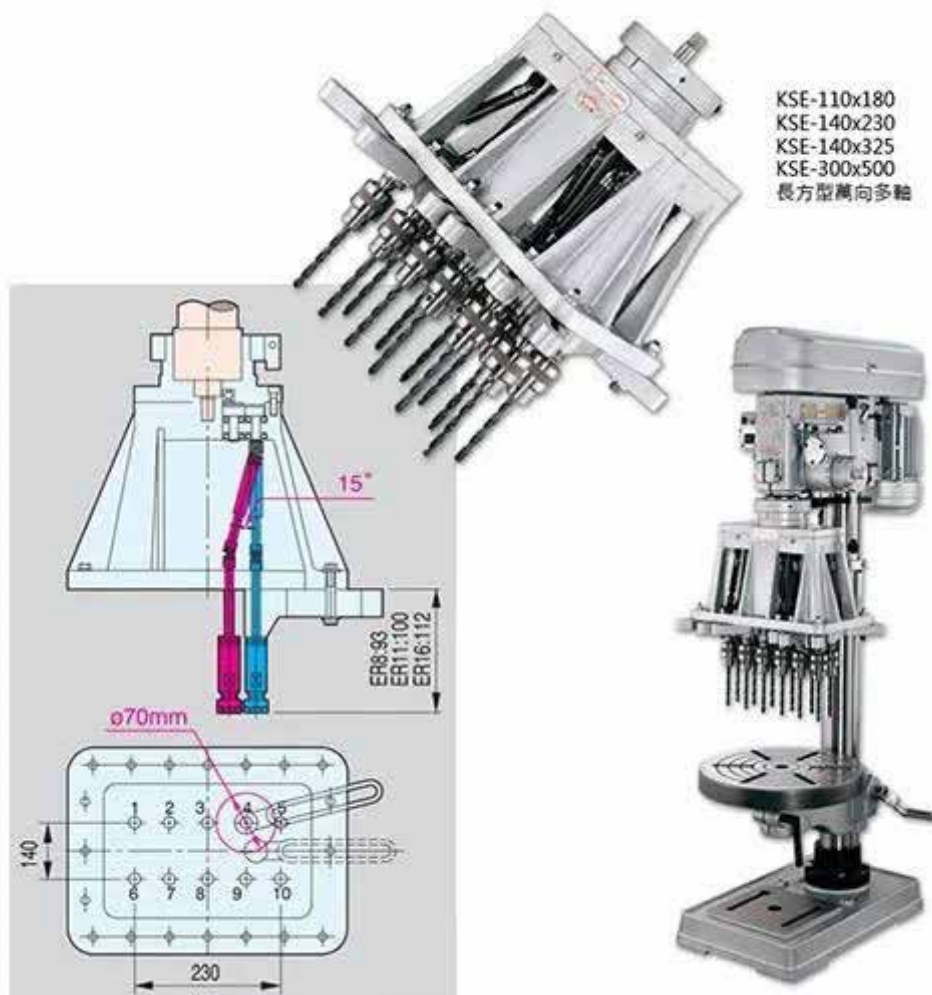

ตัวอย่างผลงาน



KSE-130 / KSE-165
KSE-200 / KSE-250
圖型萬向多軸

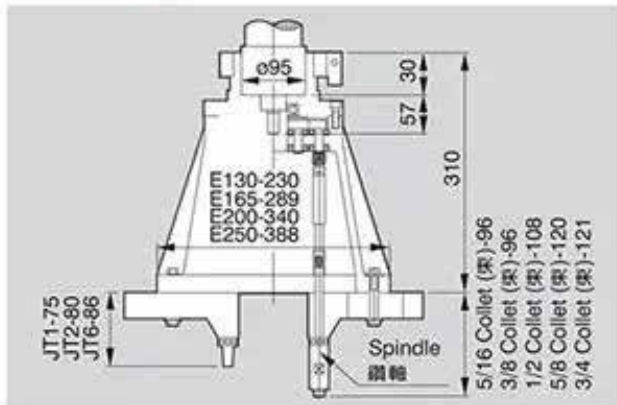

ตัวอย่างผลงาน



ตัวอย่างผลงาน



ตัวอย่างผลงาน



ตัวอย่างผลงาน



ตัวอย่างผลงาน



ตัวอย่างผลงาน



ตัวอย่างผลงาน



สยาม โชติพัฒน์ แมชชีนเนอรี่
SIAM CHOTIPATH MACHINERY

ตัวอย่างผลงาน



สยาม โชติพัฒน์ แมชชีนเนอรี
SIAM CHOTIPATH MACHINERY

ตัวอย่างผลงาน



ตัวอย่างผลงาน



หัวเจาะ 30 รู

ติดต่อ 021752487




ตัวอย่างผลงาน



ตัวอย่างผลงาน



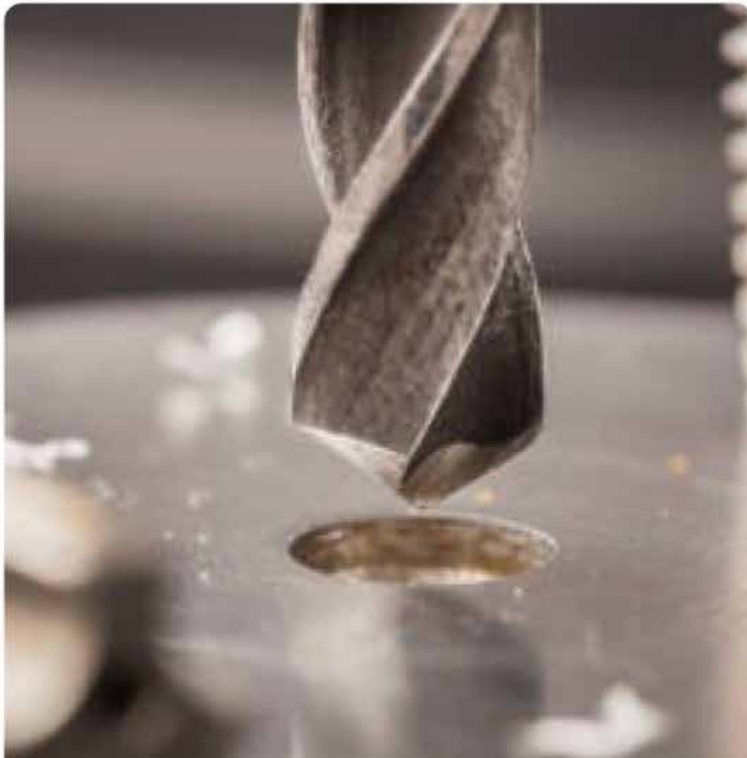



สยาม โชติพัฒน์ แมชชีนเนอรี

SIAM CHOTIPATH MACHINERY

13/20 ถนนเทพารักษ์ ช.บางปลา 19 ตำบลบางปลา อำเภอบางพลี
จังหวัดสมุทรปราการ 10540



บริษัท สยาม โซติพัฒน์ แมชชีนเนอรี จำกัด

13/20 หมู่ที่10 ซอยบางปลา19 ถนนเทพารักษ์ กม.15
ตำบลบางปลา อำเภอบางพลี จังหวัดสมุทรปราการ 10540
เบอร์โทรศัพท์ : 02-175-2487-8 โทรสาร : 02-175-2489


✉ rollingdie@gmail.com



[HTTPS://WWW.SCMACHINE-TOOLS.COM](https://www.scmachine-tools.com)



สยาม โซติพัฒน์ แมชชีนเนอรี
SIAM CHOTIPATH MACHINERY

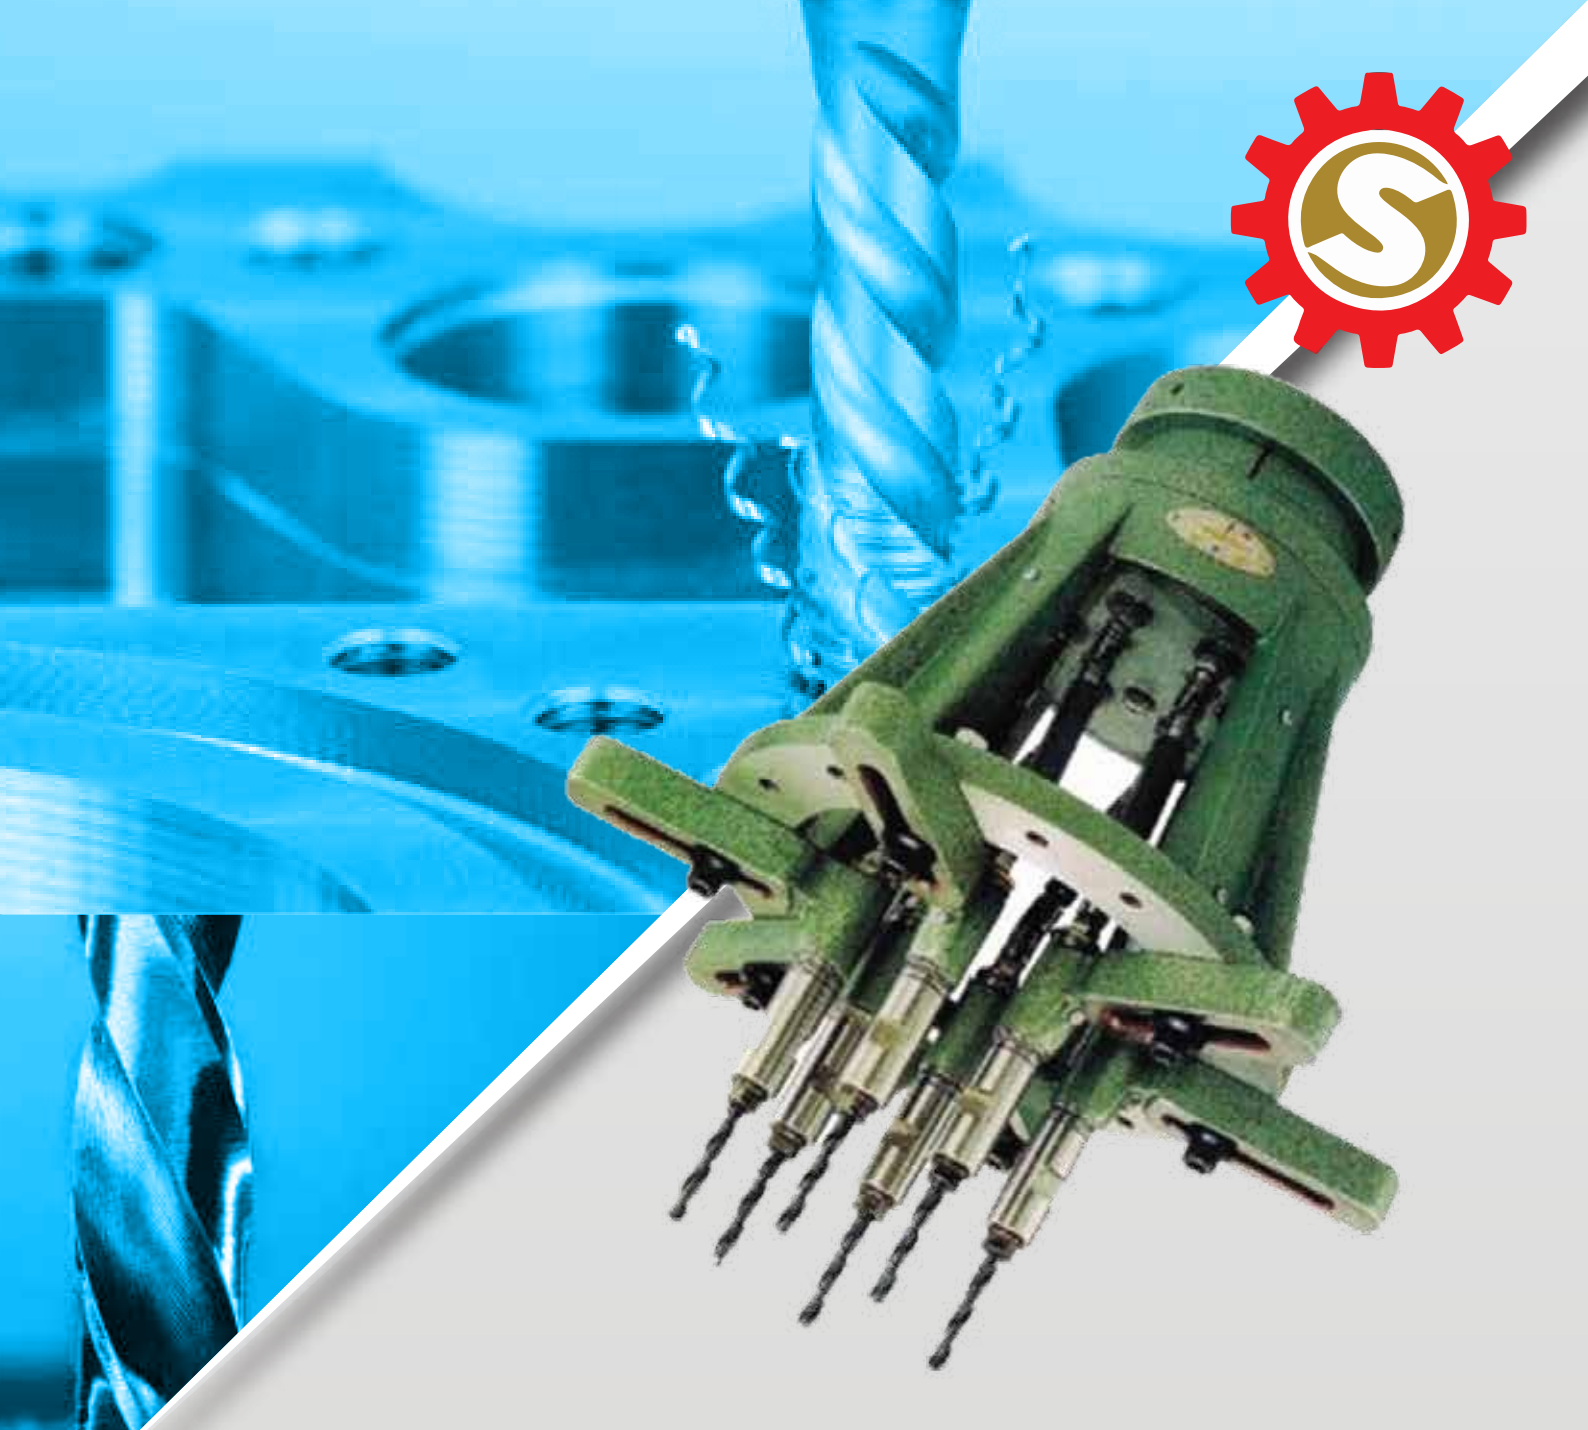

บริษัทสยาม โชติพัฒน์แมชชีนเบอร์รี่ จำกัด
SIAM CHOTIPATH MACHINERY CO.,LTD.

